



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

| | | |
|---|-----------|---|
| (51) International Patent Classification ⁶ : C12Q 1/22, C12R 1/09 | A1 | (11) International Publication Number: WO 95/06134 (43) International Publication Date: 2 March 1995 (02.03.95) |
| (21) International Application Number: PCT/US94/06158 (22) International Filing Date: 1 June 1994 (01.06.94) (30) Priority Data: 08/111,989 25 August 1993 (25.08.93) US (71) Applicant: ABTOX, INC. [US/US]; 104 Terrace Drive, Mundelein, IL 60060-3826 (US). (72) Inventors: CAPUTO, Ross, A.; 6533 Saddle Ridge Lane, Long Grove, IL 60047 (US). MARTENS, Phillip, A.; 36400 Bendell Terrace, Fremont, CA 94536 (US). (74) Agent: SIEBERT, J., Suzanne; Majestic, Parsons, Siebert & Hsue, Four Embarcadero Center, Suite 1450, San Francisco, CA 94111-4121 (US). | | (81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, LV, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>With amended claims.</i> |
| (54) Title: <i>BACILLUS CIRCULANS</i> BASED BIOLOGICAL INDICATOR FOR GASEOUS STERILANTS (57) Abstract Biological indicators are provided for use in validating and routinely monitoring oxidizing gas sterilizations. The biological indicators are based on <i>Bacillus circulans</i> spores that are enclosed in packages with sufficient permeability to admit a sterilizing amount of vapor while being substantially bacteria impermeable. | | |

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

| | | | | | |
|----|--------------------------|----|---------------------------------------|----|--------------------------|
| AT | Austria | GB | United Kingdom | MR | Mauritania |
| AU | Australia | GE | Georgia | MW | Malawi |
| BB | Barbados | GN | Guinea | NE | Niger |
| BE | Belgium | GR | Greece | NL | Netherlands |
| BF | Burkina Faso | HU | Hungary | NO | Norway |
| BG | Bulgaria | IE | Ireland | NZ | New Zealand |
| BJ | Benin | IT | Italy | PL | Poland |
| BR | Brazil | JP | Japan | PT | Portugal |
| BY | Belarus | KE | Kenya | RO | Romania |
| CA | Canada | KG | Kyrgyzstan | RU | Russian Federation |
| CF | Central African Republic | KP | Democratic People's Republic of Korea | SD | Sudan |
| CG | Congo | KR | Republic of Korea | SE | Sweden |
| CH | Switzerland | KZ | Kazakhstan | SI | Slovenia |
| CI | Côte d'Ivoire | LI | Liechtenstein | SK | Slovakia |
| CM | Cameroon | LK | Sri Lanka | SN | Senegal |
| CN | China | LU | Luxembourg | TD | Chad |
| CS | Czechoslovakia | LV | Latvia | TG | Togo |
| CZ | Czech Republic | MC | Monaco | TJ | Tajikistan |
| DE | Germany | MD | Republic of Moldova | TT | Trinidad and Tobago |
| DK | Denmark | MG | Madagascar | UA | Ukraine |
| ES | Spain | ML | Mali | US | United States of America |
| FI | Finland | MN | Mongolia | UZ | Uzbekistan |
| FR | France | | | VN | Viet Nam |
| GA | Gabon | | | | |

BACILLUS CIRCULANS BASED BIOLOGICAL INDICATOR
FOR GASEOUS STERILANTS

Field of the Invention

The present invention generally involves
5 biological indicators for gaseous sterilizing processes,
and more particularly to the use of *Bacillus circulans*
based biological indicators for gaseous oxidizing
sterilants and sterilizing processes.

Background of the Invention

10 The U.S. Pharmacopeia XXII, Official
Monograph, pp. 1625-1626 begins by defining a biological
indicator as "a characterized preparation of specific
microorganisms resistant to a particular sterilization
process. It is used to assist in the qualification of
15 the physical operation of sterilization apparatus in the
development and establishment of a validated steriliza-
tion process for a particular article, and the steri-
lization of equipment, materials, and packaging
components for aseptic processing. It may also be used
20 to monitor a sterilization cycle, once established, and
periodically in the program to revalidate previously
established and documented sterilization cycles. It is
in one of two main forms, each of which incorporates a
viable culture of a known species of microorganism. In
25 one the spores are added to a carrier (disk or strip of
filter paper, glass, or plastic) and packaged so as to
maintain the integrity of the inoculated carrier but,
when used appropriately in the individual immediate

package, so as to allow the sterilizing agent to exert its effect. In the other, the spores are added to representative units of the lot to be sterilized (inoculated product) or to similar units (inoculated similar product)."

A bit later, the *Pharmacopeia*, at p. 1626, states: "A particular strain of microbial spores selected for use as a biological indicator and resistant to one sterilization process may not necessarily be suitable for other sterilization processes or even differing sterilizing conditions of the same mode of sterilization."

State and federal legislation are severely restricting the amount of hazardous gases, such as ethylene oxide (a carcinogen), in working environments for the use of systems or methods that produce toxic residues or exhaust products. Ethylene oxide has been widely used in hospitals and other areas of the health industry for sterilization processes.

The use of plasma to sterilize containers was suggested in U.S. Patent 3,383,163. Plasma is an ionized body of gas which may be generated by the application of an electromagnetic field to gas. The ionized gas can contact microorganisms on the surfaces of the items to be sterilized and effectively destroy the microorganisms.

Two recently issued patents, of common assignment herewith, use oxidizing gases for sterilization. U.S. Patent 5,084,239, issued January 28, 1992, inventors Moulton et al., describes a process in which an antimicrobial agent treatment is alternated with a downstream plasma treatment. The antimicrobial agent may be peracetic acid vapor under reduced pressure conditions. U.S. Patent 5,115,166, issued May 19, 1992, inventors Campbell et al., describes a plasma sterilizing apparatus and method where an article to be

sterilized is exposed to active species made from a plasma. The plasma is generated from a mixture of oxygen; argon, helium, and/or nitrogen; and hydrogen, or with a mixture of air and hydrogen, supplemented by oxygen or nitrogen to give the desired ratios.

While such sterilizing processes involving oxidizing gases effectively kill organisms, including spores, without damage to the articles being sterilized and with no toxic residues or emissions presenting environmental safety hazards, monitoring the process has posed a challenge due to the reduced resistance of various commonly used biological indicator organisms to such processes. Further, *Bacillus stearothermophilus*, which is recognized as an organism useful in biological indicators for steam sterilizations, has been found to have a curvilinear response curve to oxidizing gas sterilization processes. This is disadvantageous because inactivation of an indicator organism must occur in a predictable manner. Thus, the number of viable indicator organisms in a biological indicator should decrease exponentially with exposure time to allow the sterilization process time to be adjusted with an appropriate safety margin. Under the right conditions, sterilization can approximate first order kinetics, and thus allow sterilization cycle times to be readily determined. Thus, better bacteriological indicators, particularly those suitable for gaseous oxidizing sterilants and sterilizing processes, would be useful.

Summary of the Invention

Accordingly, it is an object of the present invention to provide a biological indicator with close to first order death kinetics in gas sterilizing processes once the sterilizing agent has penetrated the packaging and has reached a substantially steady, high concentration in the vicinity of the organism spores.

It is another object of the present invention to provide a biological indicator with more consistent and relatively stable resistance to oxidizing gas sterilizing processes.

5 These and other objects of the present invention are provided in one biological indicator embodiment comprising a selected number of viable organism spores contained in a package. The organism is *Bacillus circulans*. The package is impenetrable to
10 microorganisms (that is, substantially bacteria impermeable), but has a portion having sufficient permeability to let a sterilizing amount of vapor come into contact with the spores during vapor sterilizing processes.

 In another aspect of the present invention, a
15 method for monitoring a sterilizing process is provided whereby a biological indicator including a selected number of viable *Bacillus circulans* spores are exposed to a sterilizing gas, such as an oxidizing gas. The biological indicator is then removed, and the carrier
20 incubated. The number of surviving spores can be determined under spore growth conditions.

 Biological indicators using *Bacillus circulans* as the organism are advantageous in gas sterilizing processes since the organism is considered non-pathogenic, is stable enough to provide a relatively long
25 shelf life when packaged, is easy to grow so that sterility tests can be performed using common techniques and materials, and has been found to have a higher resistance and more stable resistant pattern when
30 compared to prior art organisms such as *B. subtilis* and *B. stearothermophilus*.

Brief Description of the Drawings

 Figure 1 graphically illustrates typical survivor curves for an embodiment of the invention and
35 by comparison three other *Bacillus* organisms (*B.*

subtilis, *B. stearothermophilus*, and *B. pumilus*) with the vertical axis being a logarithmic scale of survivors and the horizontal axis being time in minutes and where the process used was a synergistic exposure to two
5 sterilants, one of which was peracetic acid vapor and the other of which was a plasma generated oxidizing gas mixture;

Figure 2 compares survivor curves of *Bacillus circulans* and *Bacillus subtilis* in a sterilizing process
10 where only peracetic acid vapor was used; and,

Figure 3 is similar to Fig. 2 but in a sterilizing process where only a plasma generated oxidizing gas mixture was used.

Detailed Description of the Preferred Embodiments

15 Biological indicator embodiments of the invention must have spores of *Bacillus circulans* packaged to maintain integrity of the spores until the biological indicator is used for its intended purpose.

Bacillus circulans cultures are available, for
20 example, from the American Type Culture Collection, 12301 Parklawn Drive, Rockville, Maryland 20852. For example, among the *B. circulans* strains available are ATCC 61, ATCC 13403, and ATCC 21821, 21822 (subspecies *n. proteophilus* and *n. biotinicus*, respectively). The
25 strain used to exemplify the present invention was obtained as ATCC 61.

Packages of the invention have at least a portion that is gas or vapor permeable, but bacteria impermeable. This portion may constitute the entire
30 package, but more usually the package will be constructed of the portion and one or more other materials. The other material, when present, is usually gas and bacteria impermeable. Examples of impermeable materials suitable in forming part of the inventive
35 packages include polyethylene, polypropylene, poly(vinyl

chloride), and poly(ethylene terephthalate), usually in the form of film, sheet, or tube.

The portion that is permeable to gas or vapor, but impermeable to bacteria will typically be microporous with the volume average diameter of pores being in the range of from about 0.02 to about 0.5 μm . The words "gas" and "vapor" are used throughout as being substantially synonymous, but where "gas" may more clearly describe the active species generated from a plasma step. Suitable microporous materials include spunbonded polyethylene, spunbonded polypropylene, microporous polyethylene, and microporous polypropylene, usually in the form of film or sheet. Paper can also be used as the permeable portion for inventive embodiments. The thickness of the permeable material can vary, but usually will be in the range of from about 0.23 to about 0.65 mm. The gas or vapor permeable portion is configured so as to define at least one path for providing entry of sterilizing gas or active species from a plasma from the chamber in which sterilization is performed and into contact with the *Bacillus circulans* spores.

Packages of the invention can be formed with seams, joints, and seals made by conventional techniques, such as, for example, heat sealing and adhesive bonding. Examples of heat sealing include sealing through use of heated rollers, sealing through use of heated bars, radio frequency sealing, and ultrasonic sealing. Peelable seals based on pressure sensitive adhesives may also be used.

The package provides integrity for the enclosed organism during shelf life until use. Other microorganisms are prevented entry by the package as barrier, since other microorganisms could interfere with or confuse sterility determinations based on the expected number and type of organism spores. Thus, the organism spores within will be preserved in a condition

so that subsequent laboratory analysis is meaningful and reliable.

Biological indicator embodiments of the invention preferably further include a carrier that is
5 inoculated with the spores. As will be understood, the carrier is simply a means by which organism spores in a selected number are positioned within the package, and then subsequently analyzed for viability. Consequently, the carrier can vary widely in the choice of materials
10 and shapes so long as the function as carrier is served.

It has been suggested that the type of product or carrier material inoculated can significantly affect the resistance of the biological indicator. The preferred filter paper carrier material has been shown
15 to have excellent storage stability for embodiments of the invention. Preferred carriers are formed of materials such as filter paper, which can be readily macerated along with the carried spores if one wishes to perform survivor determinations.

20 The carrier, such as a preferred filter paper carrier, can be quite simply inoculated with spores by preparing an aqueous suspension with the desired spore concentration and pipetting aliquots onto the carrier. Thus, inoculation of carrier can be according to the USP
25 XXII Bacteriostasis Test Method. Briefly, a suspension of *Bacillus circulans* spores in water is prepared so as to yield a desired number of spores per aliquot for inoculating a carrier such as filter paper.

Spores, rather than the vegetative form of the
30 organism, are used because vegetative bacteria are known to be easily killed by sterilizing processes. Spores also have superior storage characteristics as they can remain in their dormant state for years. Thus, when sterilization of a standardized spore strain occurs from
35 a sterilization process, such can provide a high degree of confidence that sterilization of bacterial strains in

the sterilizing chamber has occurred. The *Bacillus circulans* spores of this invention may be placed into the package as a selected number as follows.

5 A selected number of spores are inoculated on the carrier. Before inoculating spores onto the carrier, a heat shock step is desirably performed. Heat shock is a sublethal thermal treatment given to spores to prepare the enzymatic reactions for germination. Thus, a preferred sequence is a heat shock step,
10 cooling, diluting the liquid spore suspension, and then inoculating carriers. The following method can be used to prepare inoculated carriers and to perform a population count.

An inoculated disk is placed in a 10 ml
15 dilution blank. Each disk is then macerated into a homogenous suspension and vortexed vigorously for a minimum of 15 seconds. Appropriate dilutions are then conducted and each is plated. TSA (Tryptic soy agar) may be used as the recovery (growth) medium. Between
20 about 20 and 35 ml of agar is poured into each plate after the appropriate aliquot of the sample has been transferred. The plates are allowed to completely solidify, are inverted and incubated at 32-37°C for 24-48 hours. Plates that contain between about 30 and 300
25 colony forming units are counted and the average population per disk is calculated.

Biological indicators of the invention can optionally include one or more desired additional elements, such as to indicate when the biological indicator
30 has already been used. For example, such optional means can take the form of a marker, preferably a visual marker such as dye or color changeable ink. An optional such additional element can be interior the package or carried on an exterior surface. Another optional
35 component can be where the package is flexible and includes spore growth medium in a frangible, sealed

vial. This variation can be used to test for sterilization without having to remove the carrier. Illustrations of several such variations are discussed by U.S. Patent 4,743,537, issued May 10, 1988; U.S. Patent 5 4,717,661, issued January 5, 1988; U.S. Patent 3,661,717, issued May 9, 1972; and U.S. Patent 3,440,144, issued April 22, 1969, all incorporated herein by reference. Thus, after sterilization the biological indicator package can be bent or squeezed in 10 order to rupture the vial. The carrier is then exposed to the released growth medium and can be incubated without the necessity of removing the carrier from the package in order to monitor the biological indicator for growth. A visual means for indicating growth, such as 15 pH indicator dye, can be included.

The inventive biological indicators were developed for preferred use with a synergistic, two-step oxidizing gas sterilization process. However, biological indicators of the invention are broadly 20 useful with other gaseous sterilants and other gaseous sterilizing processes.

In the first step of the particular two-step process for which the invention was developed, an oxidizing gas, typically peracetic acid vapor, is 25 introduced as a sterilant. In the second step of the process, active species made in a plasma using a mixture of argon, oxygen, and hydrogen gases are passed through a gas distribution manifold to allow ion-electron recombination and fast relaxation processes to occur, 30 and the oxidizing gas mixture is then introduced into the sterilizing chamber. U.S. Patent 5,115,166 particularly describes the plasma generated gas mixture while U.S. Patent 5,084,239 describes a two-step process, one step of which can use peracetic acid vapor 35 as sterilant. Both patents are hereby incorporated herein by reference.

EXPERIMENTAL METHODOLOGY

Biological indicator embodiments of the invention were prepared as follows. Packages for the biological indicators were obtained from Baxter Laboratories as "Plastipeel Pouches." These pouches have an upper sheet of a gas permeable fabric of bound polyethylene fibers ("Tyvek"), which is already sealed on three edges and where the user seals the fourth edge, after insertion of the carrier, to a lower sheet of impermeable clear polyester film ("Mylar"). Filter paper disks (1/4 inch diameter Schleicher & Schuell 740E) were used as the carriers. Each disk was inoculated with 10^6 spores of viable organism. For comparative survivor curve experiments, each pouch contained two paper carriers, one with *Bacillus circulans* spores and the other with the organism for comparison, such as *Bacillus subtilis*. In comparing survivor curves and performing fraction negative analyses for spores of *Bacillus subtilis* and others with *Bacillus circulans*, heat seals were used to create separate compartments.

Exposure intervals for exposure to the sterilizing gas were chosen, and the biological indicators placed into a Plazlyte sterilizer (AbTox). Such an apparatus is substantially as described in U.S. Patents 5,115,166 and 5,084,239. The biological indicators were exposed to only a peracetic acid cycle, only a plasma cycle, or both cycles for the selected exposure required time intervals. The amount of peracetic acid vapor for a cycle used was approximately 2 mg/l, and the vapor was obtained by evaporating a peracetic acid solution. Thus, in addition to what is believed to be the primary gaseous oxidizing species of peracetic acid, the vapor also includes hydrogen peroxide and acetic acid (and water). The feed gas for the plasma generated gaseous mixture was argon, oxygen,

and hydrogen, which was prepared with about 91.4% argon, 3.8% hydrogen, and 4.7% oxygen and for a cycle was flowed at a volume of about 5.5 standard l/min. The combined treatment (both sterilants) used peracetic acid vapor exposure for a time interval double that (and preceding) treatment with the plasma generated gas mixture. For example, the three minute exposure time involved exposing the carriers to peracetic acid vapor for two minutes and then subjecting them to the plasma process for one minute.

After exposing the biological indicators to the sterilizing gas treatment (the wall temperature was maintained at about 95°F) the indicators were removed and tested for sterility.

Each pouch was cut open and each carrier was aseptically transferred to labelled, individual grind tubes. Each tube was vortexed until the carriers were macerated. Each macerated carrier was serially diluted using standard plate count techniques. The number of surviving spores (if any) were determined under spore growth conditions.

Survivor curves with the number of surviving spores being determined as a function of exposing step time were generated. D-values for the separate components were calculated using linear regression analysis. D-values (decimal reduction) are the time required at a given set of exposure conditions to reduce a specific population by 90%, and are the negative reciprocal of the slope of the line fitted to the graph of the logarithm of the number of survivors versus time.

Following the experimental methodology just described, data for biological indicator embodiments of the invention and comparative data were determined, as described below.

EXAMPLE 1

Using peracetic acid vapor as the sole sterilant, survivor curves and fraction negative analyses were generated for spores of *Bacillus subtilis* and *Bacillus circulans*. Exposure times for enumeration were 3, 6, 9, 12, 15, and 18 minutes (and for fraction negative testing, exposure times were 9, 12, 15, 18, 21, and 24 minutes. After exposure, each biological indicator was tested for population or sterility and an additional three unexposed carriers from each micro-organism were enumerated as positive controls. Table 1 sets out the average data from triplicate such experiments.

TABLE 1

| | Inventive Embodiment (<i>Bacillus circulans</i>) | Comparative (<i>Bacillus subtilis</i>) |
|----|---|---|
| 0 | 6.21 | 6.04 |
| 3 | 6.12 | 5.38 |
| 6 | 6.00 | 3.78 |
| 9 | 5.19 | 1.34 |
| 12 | 2.82 | 1.03 |
| 15 | 1.34 | 0.03 |
| 18 | 1.10 | -0.32 |

D-values with peracetic acid vapor phase only were 3.0 minutes for *B. circulans* (and 2.2 minutes for peracetic acid vapor phase with *B. subtilis*).

The data of Table 1 is plotted in Fig. 2. These data show that *Bacillus circulans* is as resistant to peracetic acid vapor as *B. subtilis*, but with a major difference being the lag factor exhibited for *Bacillus circulans* at the shorter process exposures.

EXAMPLE 2

Another experiment similar to that described for Example 1 was performed (in triplicate), but where the inventive biological indicator embodiments and the comparative indicators were exposed to the plasma phase cycle only. The data from this experiment are set out in Table 2.

TABLE 2

| | Inventive Embodiment (<i>Bacillus circulans</i>) | Comparative (<i>Bacillus subtilis</i>) |
|----|---|---|
| 10 | 0 | 6.12 |
| | 3 | 5.86 |
| | 6 | 4.64 |
| | 9 | 3.88 |
| 15 | 12 | 2.06 |
| | 15 | 0.79 |
| | 18 | 0.70 |

These data are plotted by Figure 3 and demonstrate that *Bacillus circulans* is as resistant to the plasma processing cycle as *Bacillus subtilis*.

EXAMPLE 3

Another experiment was performed (in triplicate) in a similar manner to Examples 1 and 2 but where a peracetic acid vapor cycle was conducted followed by the plasma generated, oxidizing gas mixture cycle. In addition, comparison was made with two more organisms. Table 3 sets out these data while Fig. 1 graphically illustrates the typical survivor curve analysis of an inventive embodiment when compared to three other organisms.

TABLE 3

| | | Inventive Embodiment <i>B. circulans</i> | Comparative <i>B. subtilis</i> | <i>B. stearo- thermophilus</i> | <i>B. pumilus</i> |
|----|----|--|-----------------------------------|------------------------------------|-------------------|
| 5 | 0 | 6.54 | 6.05 | 6.16 | 5.79 |
| | 3 | 6.27 | 3.87 | 4.19 | 3.77 |
| | 6 | 5.49 | 2.85 | 2.92 | 1 |
| | 9 | 4.22 | | 2.24 | |
| | 12 | 2.91 | | 1.56 | |
| 10 | 15 | 1.16 | | 0.58 | |

D-values for *B. circulans* in the combined process (peracetic acid vapor cycle followed by plasma phase cycle) were in the range of 1.7 to 2.4 minutes.

EXAMPLE 4

15 The population and resistance stability of
biological indicator embodiments of the invention were
investigated, since a known, predictable, stable level
of resistance is important to be maintained over an
adequate shelf life. Table 4 sets out the data taken
20 from the biological indicator stability evaluations over
an eight month storage time (ambient conditions).

TABLE 4

| | <u>Lot Number</u> | <u>Storage Time (Month)</u> | <u>Spore Count* x 10⁶</u> |
|----|-------------------|-----------------------------|--------------------------------------|
| 5 | 1 | 0 | |
| | | 2 | 2.0 |
| | | 5 | 1.9 |
| | | 6 | 2.2 |
| | | 8 | 2.0 |
| 10 | 2 | 0 | |
| | | 2 | 2.1 |
| | | 5 | 1.8 |
| | | 6 | 2.6 |
| | | 8 | 2.3 |
| 15 | 3 | 0 | |
| | | 2 | 2.0 |
| | | 5 | 1.6 |
| | | 6 | 2.1 |
| | | 8 | 1.6 |

* Reported population represents the averaged counts derived from a minimum quantity of six (6) individual BI's, each plated in triplicate.

This data indicates the ambient temperature storage stability of the *B. circulans* spores dried on paper carriers demonstrates storage stability for an eight month or longer product expiration date.

Biological indicator embodiments of the invention are contemplated to be an integral part of oxidizing gas sterilization cycle validation and routine monitoring programs and can be used quantitatively to demonstrate that sterilization has been achieved. The known population and resistance levels of inventive embodiments can be used to give sterilization assurances to any predetermined probability, and provide a known, predictable, stable level of resistance over a reasonable ambient temperature shelf life.

It is to be understood that while the invention has been described above in conjunction with preferred specific embodiments, the description and examples are intended to illustrate and not limit the scope of the invention, which is defined by the scope of the appended claims.

It is Claimed:

1. A biological indicator comprising:
a selected number of viable organism spores,
the organism being *Bacillus circulans*;
a carrier being inoculated with the spores;
5 and,
a package for the inoculated carrier, the
package including a portion having sufficient
permeability to admit a sterilizing amount of gas or
vapor into contact with the spores, the package being
10 substantially bacteria impermeable.
2. The biological indicator as in claim 1
wherein the selected number of spores is in the range of
about 5×10^5 to about 5×10^6 .
3. The biological indicator as in claim 1
wherein the organism includes *Bacillus circulans* ATCC
61.
4. The biological indicator as in claim 1
wherein the carrier is formed of an adsorbent matrix and
the spores are adsorbed thereon and/or perfused therein.
5. The biological indicator as in claim 1
wherein the permeable package portion admits gaseous
oxidizing agent.
6. The biological indicator as in claim 1
wherein the permeable package portion admits peracetic
acid vapor and/or a gaseous mixture of two or more of
argon, helium, nitrogen, oxygen and hydrogen at reduced
5 pressure.

7. The biological indicator as in claim 6 wherein the reduced pressure is from about 0.1 to about 10 torr.

8. The biological indicator as in claim 5 wherein the package portion admits the sterilizing amount in less than about five minutes after package exposure thereto.

9. The biological indicator as in claim 1 wherein the package is flexible.

10. The biological indicator as in claim 9 further comprising a quantity of growth medium for the spores, the growth medium disposed within the package and separated from the spores by a frangible member.

11. The biological indicator as in claim 10 wherein the frangible member is of construction sufficient sealingly to enclose the growth medium within the package until sufficient force is applied to the
5 package to rupture the member.

12. A method for monitoring a sterilizing process, comprising:

disposing a biological indicator in a sterilizing chamber, the biological indicator including
5 a selected number of viable *Bacillus circulans* spores;
exposing the biological indicator to a sterilizing gas; and

removing the biological indicator from the sterilizing chamber and incubating the carrier under
10 spore growth conditions.

13. The method as in claim 12 wherein the exposing step includes exposure to an oxidizing gas.

14. The method as in claim 12 wherein the exposing step includes exposure to peracetic acid vapor, hydrogen peroxide vapor, a mixture of peracetic acid and hydrogen peroxide vapors, and/or to a plasma generated, 5 gas mixture of oxygen and one or more of argon, helium, nitrogen, and hydrogen.

15. The method as in claim 12 wherein the sterilizing chamber is evacuated before the exposing step.

16. The method of in claim 15 wherein the evacuation is to a reduced pressure of from about 0.1 to about 10 torr.

17. The method as in claim 12 wherein the number of surviving spores are determined under spore growth conditions as a function of exposing step time.

AMENDED CLAIMS

[received by the International Bureau
on 4 January 1995 (04.01.95); original claim 5 amended;
remaining claims unchanged (1 page)]

1. A biological indicator comprising:
a selected number of viable organism spores, the
organism being *Bacillus circulans*;
5 a carrier being inoculated with the spores; and,
a package for the inoculated carrier, the
package including a portion having sufficient permeability
to admit a sterilizing amount of gas or vapor into contact
with the spores, the package being substantially bacteria
10 impermeable.
2. The biological indicator as in claim 1
wherein the selected number of spores is in the range of
about 5×10^5 to about 5×10^6 .
3. The biological indicator as in claim 1
wherein the organism includes *Bacillus circulans* ATCC 61.
4. The biological indicator as in claim 1
wherein the carrier is formed of an adsorbent matrix and
the spores are adsorbed thereon and/or perfused therein.
5. The biological indicator as in claim 1
wherein the permeable package portion admits gaseous
oxidizing agent and the package is substantially liquid
impermeable.
6. The biological indicator as in claim 1
wherein the permeable package portion admits peracetic
acid vapor and/or a gaseous mixture of two or more of
argon, helium, nitrogen, oxygen and hydrogen at reduced
5 pressure.

1/3

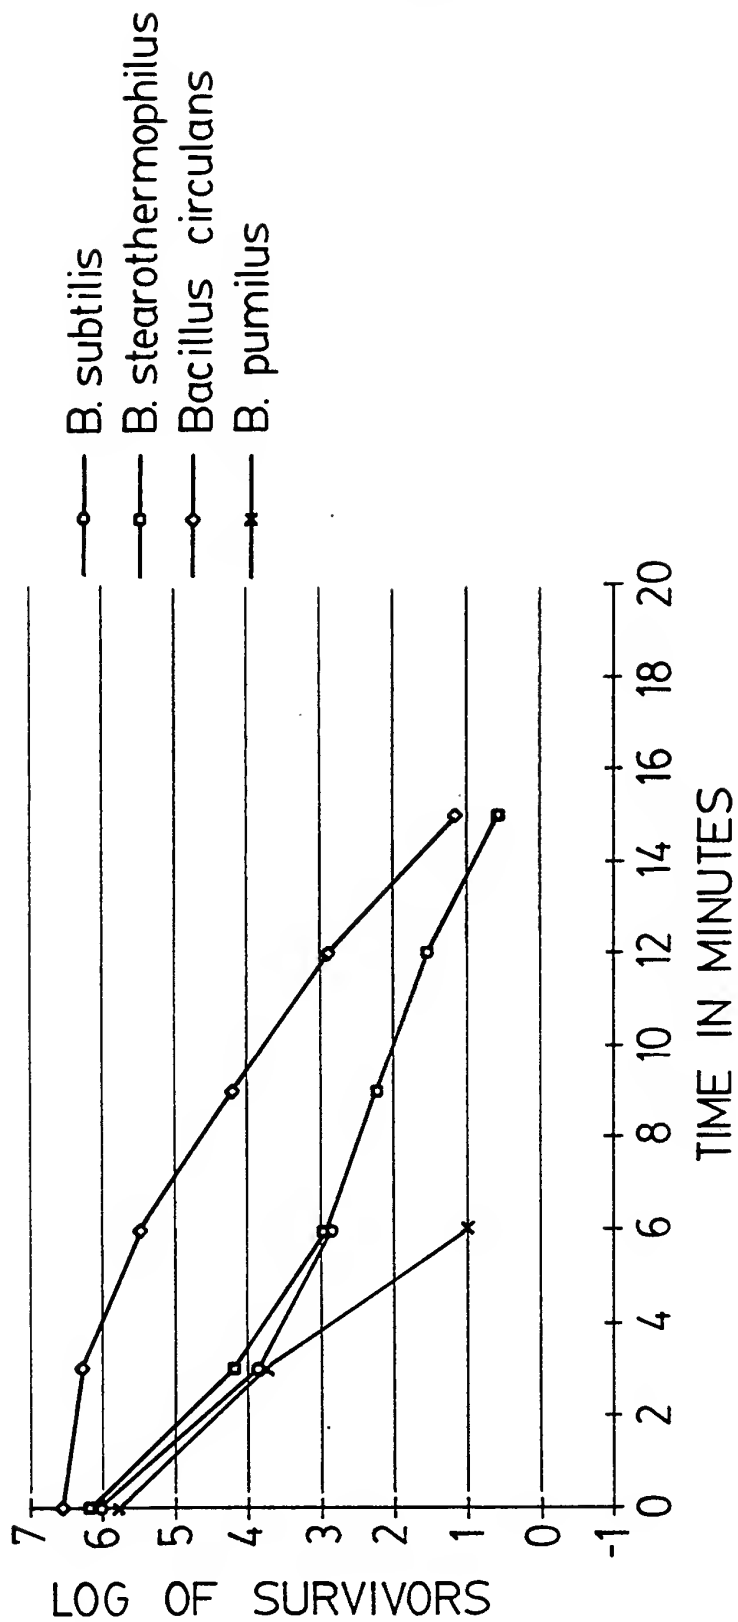


FIG. 1.

2/3

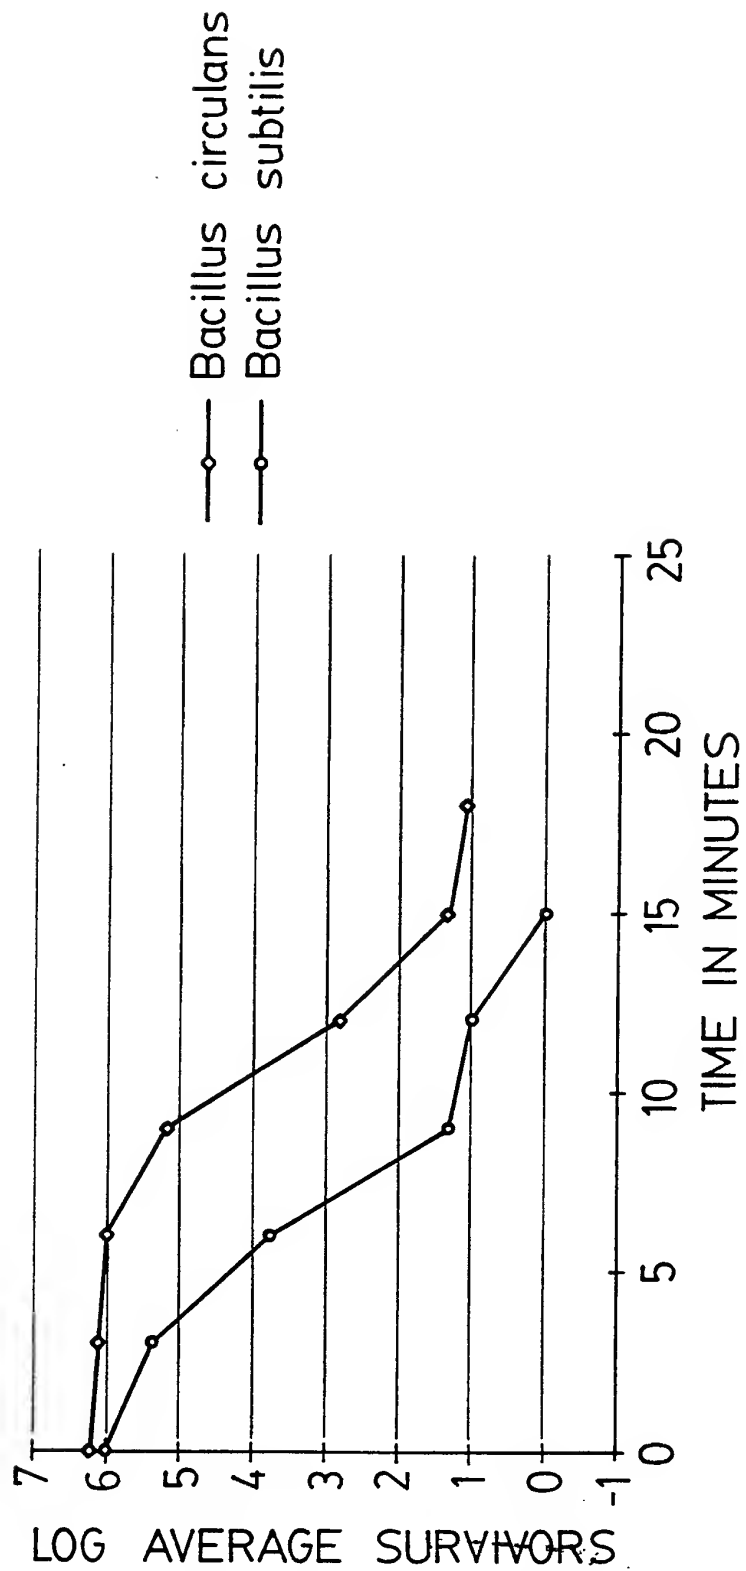


FIG. 2.

3/3

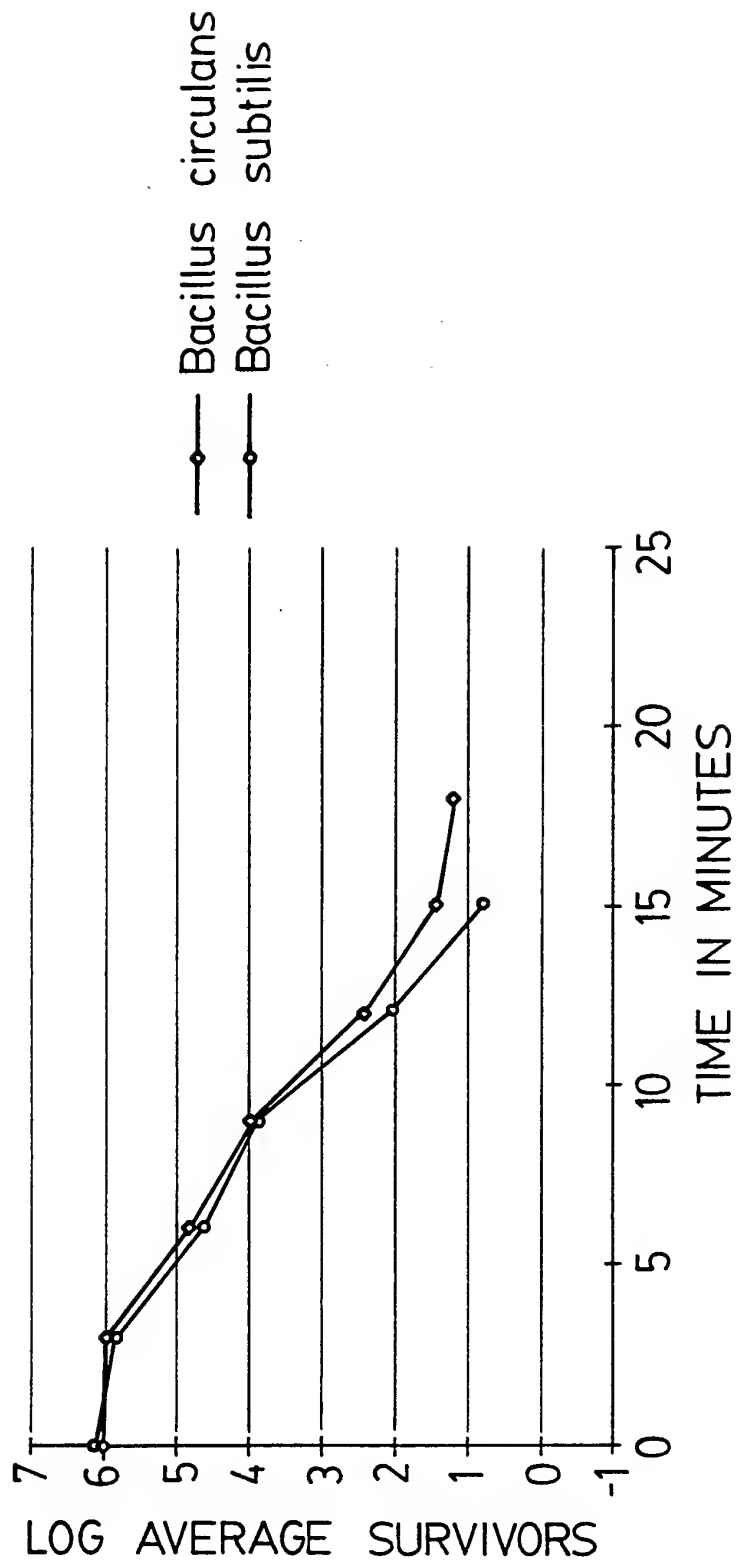


FIG. 3.

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C12Q1/22 C12R1/09

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C12Q A61L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| A | US,A,3 661 717 (R.L.NELSON) 9 May 1972 cited in the application see the whole document --- | 1,4,5, 10,12,13 |
| A | US,A,4 743 537 (P.J.MCCORMICK ET AL.) 10 May 1988 cited in the application see claims --- | 1,4,5, 10,12,13 |
| A | US,A,5 115 166 (B.A.CAMPBELL ET AL.) 19 May 1992 cited in the application see abstract --- -/-- | 1,5,6,14 |

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

25 October 1994

Date of mailing of the international search report

07.11.94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Hitchen, C

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| A | <p>BIOLOGICAL ABSTRACTS, vol. 72, no. 5 1981, Philadelphia, PA, US; abstract no. 30742, M.MIYAUCHI ET AL. 'Microbiological studies on heat processed foods : 1. Survival of microorganisms in commercial canned foods.' page 3218 ; see abstract & Bull. Fac. Fish Hokkaido Univ. 31(4): 362-373. 1980</p> <p style="text-align: center;">-----</p> | 1 |

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|---|--|
| US-A-3661717 | 09-05-72 | DE-A, B, C 2027604 FR-A, B 2045855 GB-A- 1316808 SE-B- 364117 | 11-02-71 05-03-71 16-05-73 11-02-74 |
| US-A-4743537 | 10-05-88 | US-A- 4717661 GB-A, B 2186974 JP-A- 62228147 | 05-01-88 26-08-87 07-10-87 |
| US-A-5115166 | 19-05-92 | EP-A- 0387022 JP-A- 2279160 US-A- 5186893 US-A- 5178829 US-A- 5288460 | 12-09-90 15-11-90 16-02-93 12-01-93 22-02-94 |